RS6-34 GEN:3







R56-34 GEN:3 Created on March 14, 2024 at 3:17:02 PM UTC

Compatible		
Capacities	Imperial 6000 lb	
Max. capacity		
Max. lifting height	34 ft 3 in	
Max. outreach	23 ft	
Weight and dimensions		
Overall length to carriage	l11 16 ft	
Length to face of forks	l2 16 ft 1 in	
Overall width	b1 7 ft 10 in	
Overall height	h17 7 ft 9 in	
Wheelbase	y 9 ft 2 in	
Ground clearance	m4 14 in	
External turning radius	Wa3 12 ft 6 in	
Unladen weight	15102 lb	
Overall weight	15113 lb	
Standard tires	15 x 19.5	
Frame leveling longitudinal +/-	10 °	
Engine		
Engine brand	Deutz	
Engine norm	Stage IV / Tier 4 Final	
Engine model	TD 3.6 L4	
I.C. Engine power rating - Power	74 Hp / 55 kW	
Max. torque / Engine rotation	243 ft/lbs @ 2500 rpm	
Transmission		
Transmission type	Torque converter with powershift gea	arbox
Number of gears (forward / reverse)	3/3	
Max. travel speed	18 mph	
Parking brake	SAHR	
Service brake	Wet disc brakes	
Axle Manufacturer	Dana	
Hydraulics		
Hydraulic pump type	Gear pump	
Hydraulic flow / Pressure	29 US gpm-3002 PSI	
Tank capacities		
Hydraulic oil	29 US gal	
Fuel tank	29 US gal	
Miscellaneous		
Steering wheels (front / rear)	2/2	
Drive wheels (front / rear)	2/2	
Safety cab homologation	ROPS/FOPS	
Controls	Single joystick with FNR	

RS6-34 GEN:3 - Load chart

Machine on tyres with forks Imperial



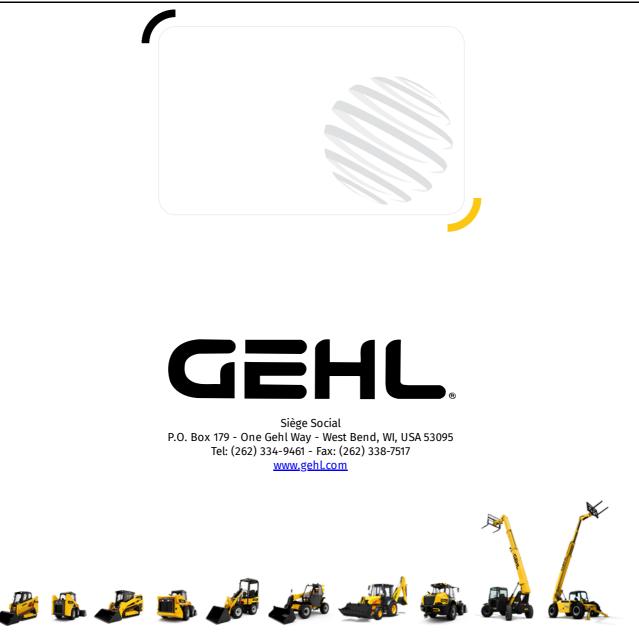

This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend